



SPC-750

Gasdruckfeder Speed Control




8

Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

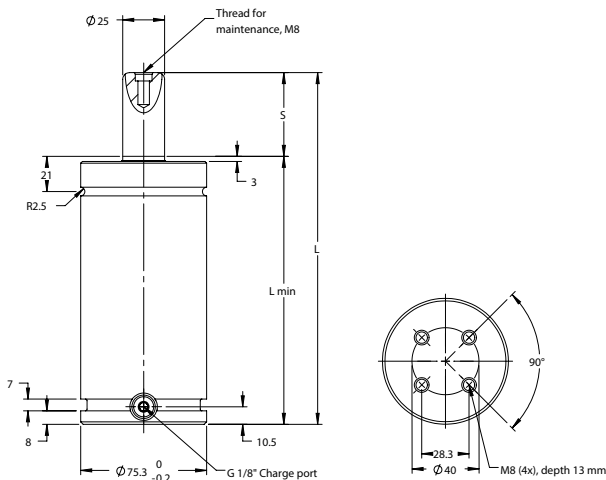

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
80	270	190	740	870	5.50	0.30	SPC-750-80
100	310	210	740	870	5.80	0.36	SPC-750-100
125	360	235	740	870	6.10	0.44	SPC-750-125
160	430	270	740	870	6.60	0.55	SPC-750-160
200	510	310	740	870	7.15	0.67	SPC-750-200
250	610	360	740	870	7.85	0.83	SPC-750-250
300	710	410	740	870	8.60	0.98	SPC-750-300

EINBAUVARIANTEN

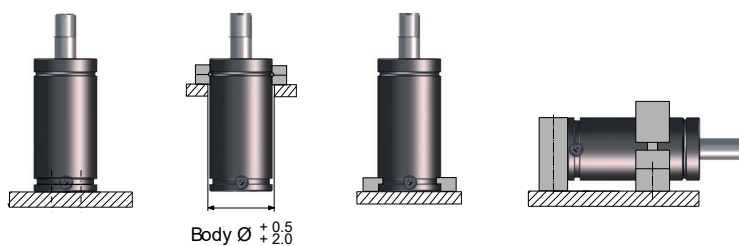Body $\varnothing^{+0.5}_{+2.0}$

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 16 - 46
Instandhaltungsset	3421490

D 3002B 03.2025