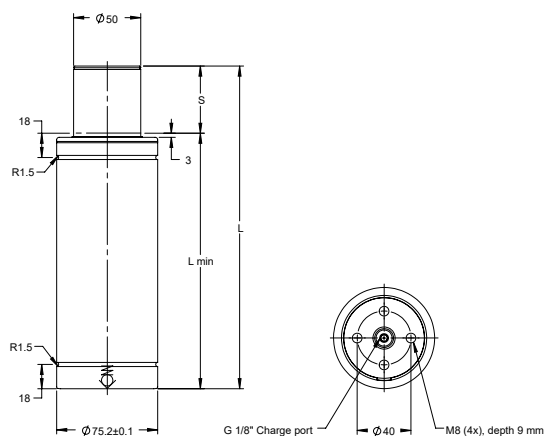
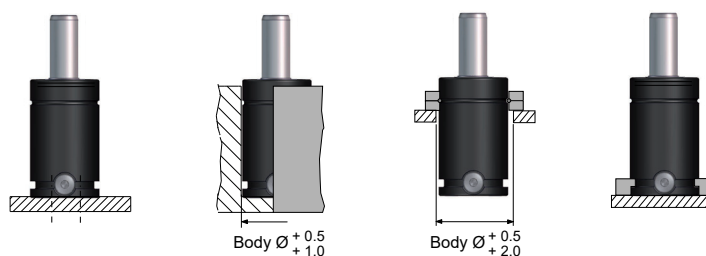


**CU4-4700**
Gasdruckfeder

Grün
Blau
Rot
Gelb
Schwarz

**T: < 80 °C** $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	80	70	4700	6700	1.55	0.10	CU4-4700-10
16	106	90	4700	6600	1.79	0.17	CU4-4700-16
25	135	110	4700	6800	2.05	0.24	CU4-4700-25
32	167	135	4700	6700	2.34	0.32	CU4-4700-32
40	200	160	4700	6700	2.65	0.41	CU4-4700-40
50	240	190	4700	6700	3.01	0.52	CU4-4700-50
65	273	208	4700	7100	3.12	0.62	CU4-4700-65

EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	0,8 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 80 - 100
Instandhaltungsset	3024838