


**LCF-750**
Gasdruckfeder

Grün
Blau
Rot
Gelb
Schwarz

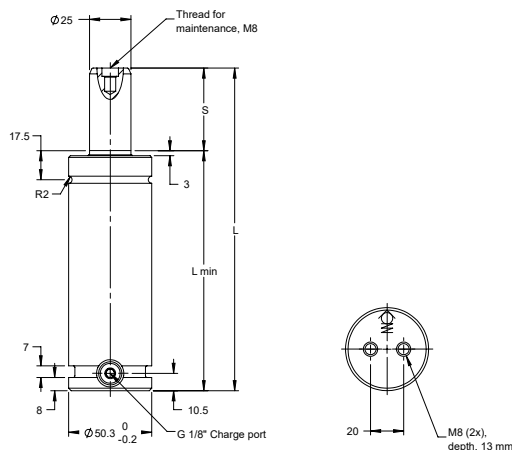


T: < 80 °C

 $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	12.7	120.4	107.7	740	1200	1.3	0.030	LCF-750-13
25	25	145	120	740	1200	1.45	0.040	LCF-750-25
38	38.1	171.2	133.1	740	1200	1.50	0.060	LCF-750-38
50	50	195	145	740	1200	1.70	0.070	LCF-750-50
64	63.5	222	158.5	740	1200	1.75	0.090	LCF-750-64
80	80	255	175	740	1200	1.95	0.11	LCF-750-80
100	100	295	195	740	1200	2.15	0.14	LCF-750-100
125	125	345	220	740	1210	2.40	0.17	LCF-750-125
160	160	415	255	740	1210	2.70	0.21	LCF-750-160
200	200	495	295	740	1210	3.10	0.26	LCF-750-200
250	250	595	345	740	1210	3.6	0.33	LCF-750-250
300	300	695	395	740	1210	4.10	0.39	LCF-750-300

EINBAUVARIANTEN

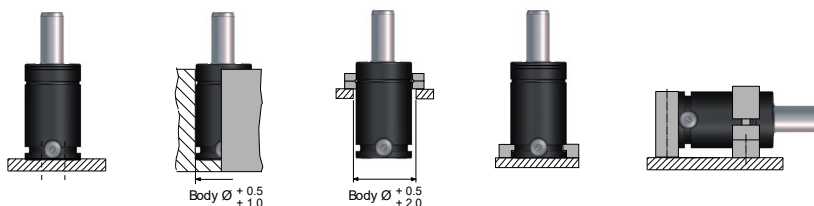

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	70 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3019377