




SN2811-1700

Gasdruckfeder Extra Power

Gas spring Extra Power

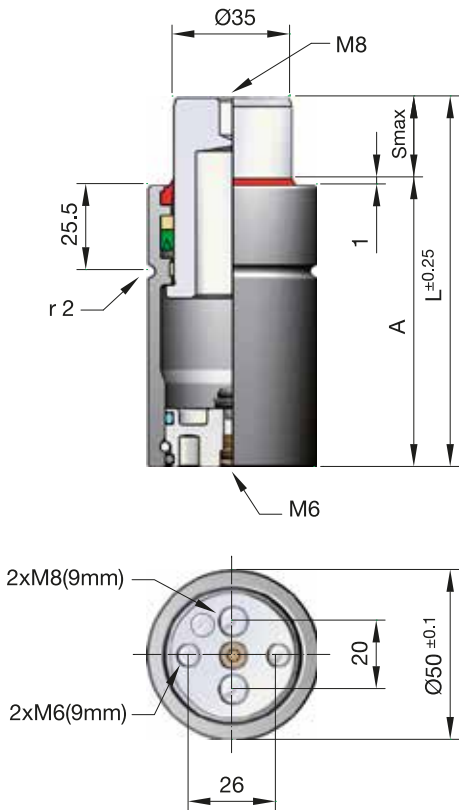


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	72	84	175	1700 (± 5%)	2410	9.62	0.82	0.039	SN2811-1700-12
25	85	110	175	1700 (± 5%)	2745	9.62	0.91	0.062	SN2811-1700-25
25B	90	115	175	1700 (± 5%)	2575	9.62	1.00	0.069	SN2811-1700-25B
38	102	140	175	1700 (± 5%)	2795	9.62	1.12	0.092	SN2811-1700-38
50	115	165	175	1700 (± 5%)	2890	9.62	1.25	0.115	SN2811-1700-50
63	132	195	175	1700 (± 5%)	2895	9.62	1.35	0.145	SN2811-1700-63
80	155	235	175	1700 (± 5%)	2885	9.62	1.48	0.185	SN2811-1700-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

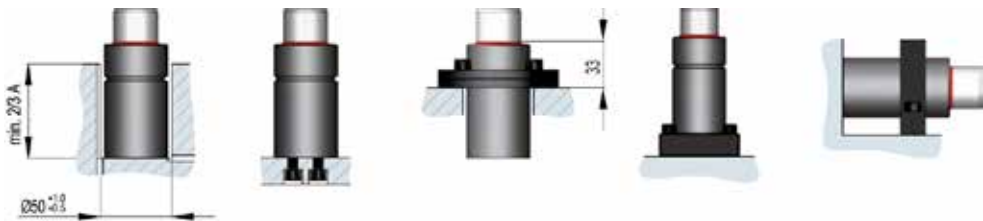



SN2811-1700
Gasdruckfeder Extra Power
Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-H1700
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

