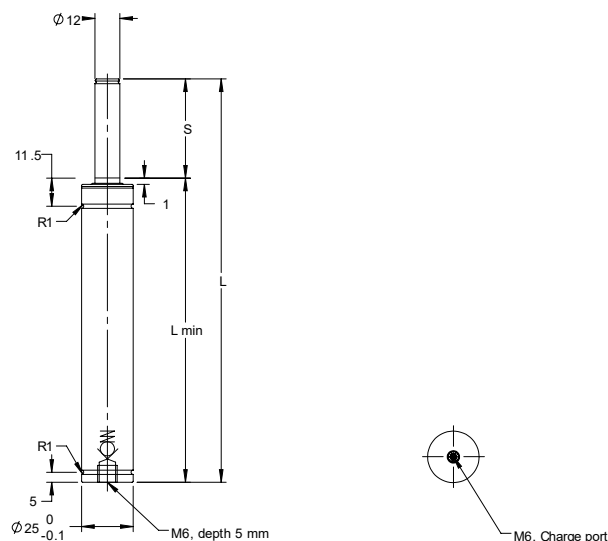



**CU4-420***Gasdruckfeder*

8

Grün
Blau
Rot
Gelb
Schwarz

 $T: < 80^{\circ}\text{C}$  $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
6	56	50	425	730	0.13	0.003	CU4-420-6
10	70	60	425	730	0.15	0.005	CU4-420-10
16	91	75	425	730	0.18	0.008	CU4-420-16
25	120	95	425	740	0.22	0.011	CU4-420-25
32	140	108	425	790	0.24	0.021	CU4-420-32
40	165	125	425	800	0.27	0.026	CU4-420-40
50	195	145	425	800	0.31	0.032	CU4-420-50

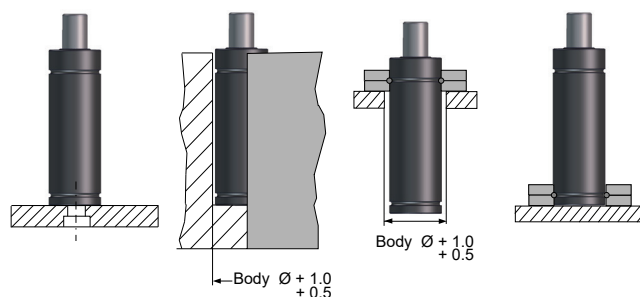EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	0,8 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	-