




SN2811-C-1700

Gasdruckfeder Extra Power

Gas spring Extra Power

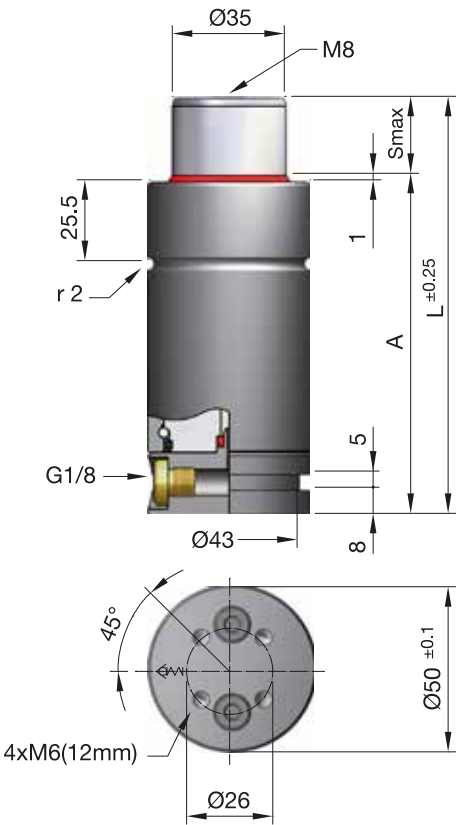


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	92	104	175	1700 (± 5%)	2410	9.62	1.12	0.039	SN2811-C-1700-12
25	105	130	175	1700 (± 5%)	2745	9.62	1.21	0.062	SN2811-C-1700-25
25B	110	135	175	1700 (± 5%)	2575	9.62	1.30	0.069	SN2811-C-1700-25B
38	122	160	175	1700 (± 5%)	2795	9.62	1.42	0.092	SN2811-C-1700-38
50	135	185	175	1700 (± 5%)	2890	9.62	1.55	0.115	SN2811-C-1700-50
63	152	215	175	1700 (± 5%)	2895	9.62	1.65	0.145	SN2811-C-1700-63
80	175	255	175	1700 (± 5%)	2885	9.62	1.78	0.185	SN2811-C-1700-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

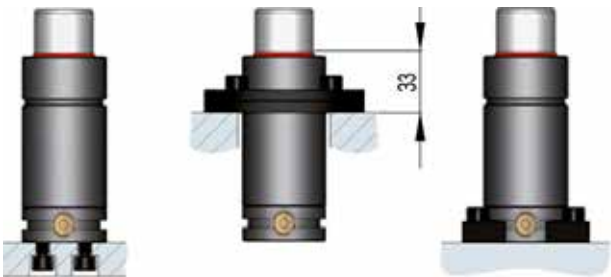



SN2811-C-1700

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC1700
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

