


**TX-20000**Gasdruckfeder Power Line -
Heavy Duty

8

Grün
Blau
Rot
Gelb
Schwarz




Norm: ISO 11901
T: < 80 °C

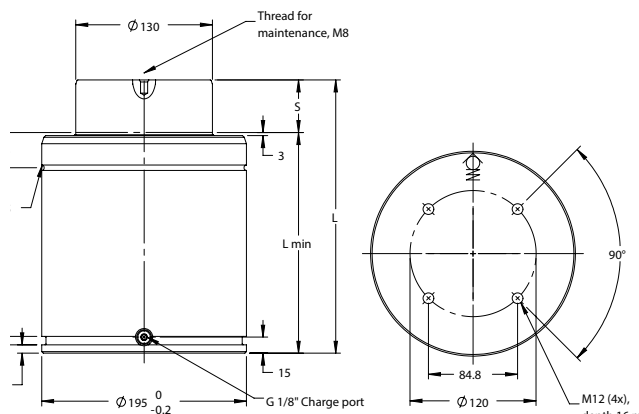

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	210	185	20000	24200	28.20	2.03	TX-20000-25
38	236	198	20000	25640	29.57	2.41	TX-20000-38
50	260	210	20000	26680	30.83	2.77	TX-20000-50
63	286	223	20000	27600	32.20	3.15	TX-20000-63
75	310	235	20000	28310	33.46	3.51	TX-20000-75
80	320	240	20000	28570	33.98	3.66	TX-20000-80
100	360	260	20000	29460	36.09	4.25	TX-20000-100
125	410	285	20000	30310	38.71	5.00	TX-20000-125
150	460	310	20000	30970	41.34	5.74	TX-20000-150
160	480	320	20000	31200	42.39	6.04	TX-20000-160
175	510	335	20000	31500	43.97	6.48	TX-20000-175
200	560	360	20000	31900	46.60	7.23	TX-20000-200
250	660	410	20000	32560	51.85	8.71	TX-20000-250
300	760	460	20000	33060	57.11	10.20	TX-20000-300

EINBAUVARIANTEN

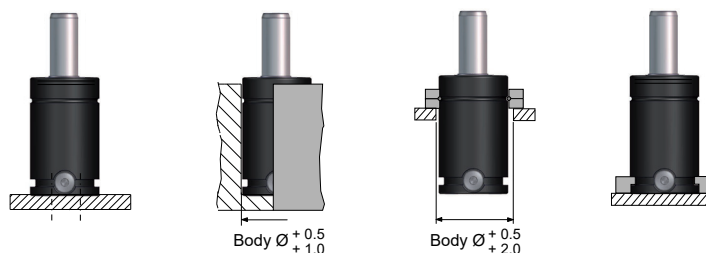

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 100
Instandhaltungsset	3026204