

**X-350**

Gasdruckfeder Power Line




8

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

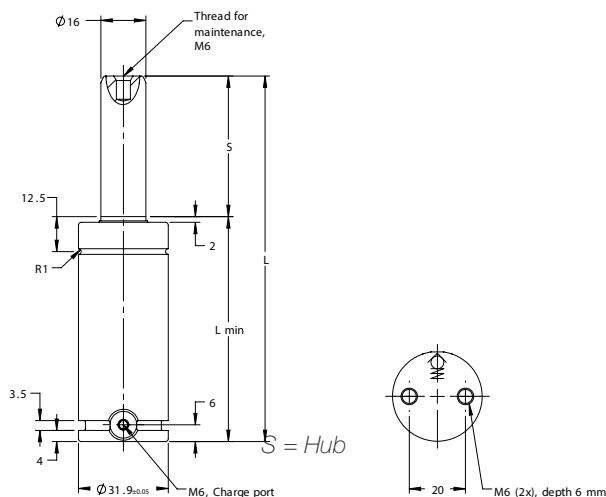

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	50	40	360	590	0.17	0.010	X-350-10
13	56	43	360	520	0.18	0.010	X-350-13
16	62	46	360	530	0.19	0.010	X-350-16
19	68	49	360	560	0.20	0.010	X-350-19
25	80	55	360	550	0.22	0.020	X-350-25
32	94	62	360	550	0.24	0.020	X-350-32
38	106	68	360	550	0.26	0.030	X-350-38
50	130	80	360	560	0.29	0.030	X-350-50
63	156	93	360	550	0.33	0.040	X-350-63
75	180	105	360	550	0.37	0.050	X-350-75
80	190	110	360	550	0.39	0.050	X-350-80
100	230	130	360	550	0.45	0.060	X-350-100
125	280	155	360	550	0.53	0.080	X-350-125

EINBAUVARIANTEN

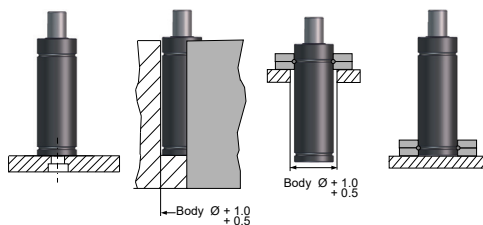

Druckmedium	N2
Max. Fülldruck (bei 20° C)	180 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3018845

D 3002B 03.2025