



CX-500


Gasdruckfeder Compact Xtreme



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

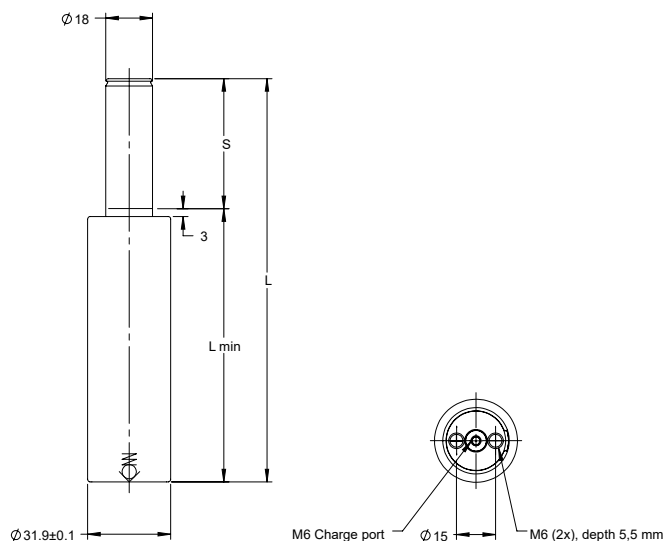 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	75	65	510	660	0.27	0.010	CX-500-10
15	85	70	510	710	0.29	0.020	CX-500-15
25	105	80	510	790	0.33	0.020	CX-500-25
38	130	92	510	870	0.37	0.030	CX-500-38
50	155	105	510	910	0.42	0.040	CX-500-50
63	190	127	510	880	0.50	0.050	CX-500-63
80	225	145	510	920	0.56	0.060	CX-500-80

EINBAUVARIANTEN

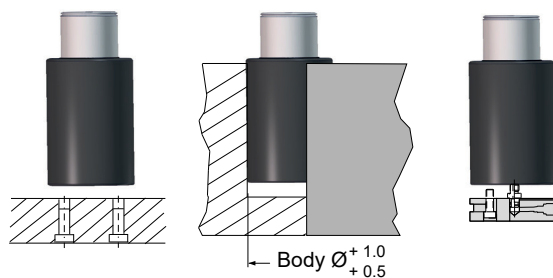

Druckmedium	N2
Max. Fülldruck (bei 20° C)	200 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 70 - 200
Instandhaltungsset	-