



CU4-740


Gasdruckfeder



Grün
Blau
Rot
Gelb
Schwarz






T: < 80 °C

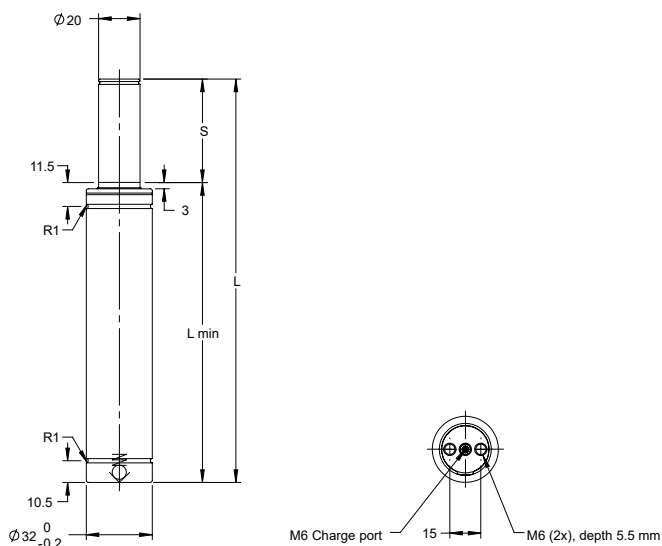

$S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
6	63	57	740	1000	0.20	0.012	CU4-740-6
10	75	65	740	1000	0.24	0.017	CU4-740-10
16	93	77	740	1100	0.28	0.024	CU4-740-16
25	120	95	740	1200	0.33	0.034	CU4-740-25
32	140	108	740	1200	0.37	0.042	CU4-740-32
40	165	125	740	1200	0.42	0.052	CU4-740-40
50	195	145	740	1200	0.48	0.063	CU4-740-50

EINBAUVARIANTEN



Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	0,8 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3025048