



XG-1000


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

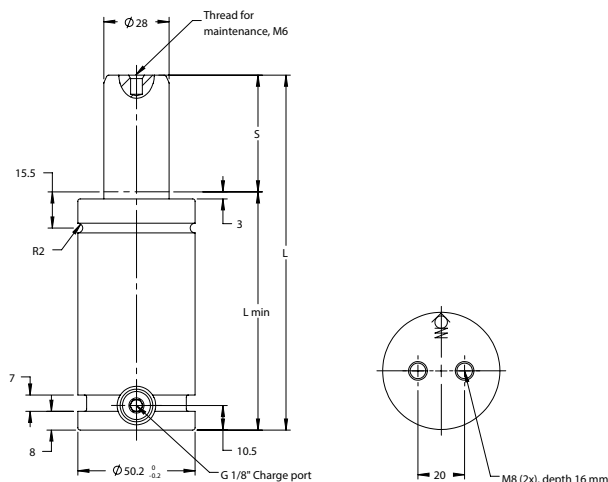

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	78	65	920	1380	0.70	0.030	XG-1000-13
16	84	68	920	1380	0.72	0.040	XG-1000-16
19	90	71	920	1400	0.74	0.040	XG-1000-19
25	102	77	920	1420	0.79	0.050	XG-1000-25
32	116	84	920	1430	0.84	0.060	XG-1000-32
38	128	90	920	1450	0.89	0.070	XG-1000-38
50	152	102	920	1460	0.98	0.090	XG-1000-50
63	178	115	920	1470	1.09	0.11	XG-1000-63
75	202	127	920	1470	1.18	0.13	XG-1000-75
80	212	132	920	1480	1.22	0.14	XG-1000-80
100	252	152	920	1480	1.41	0.17	XG-1000-100
125	302	177	920	1480	1.60	0.21	XG-1000-125

EINBAUVARIANTEN

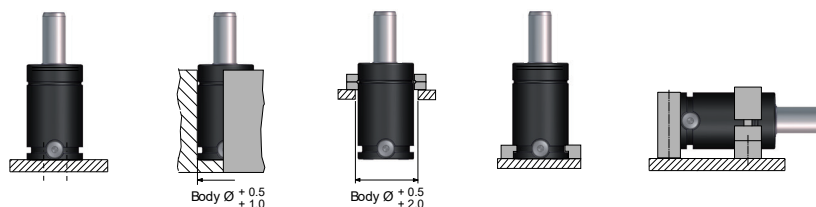

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3018847