

**X-750**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

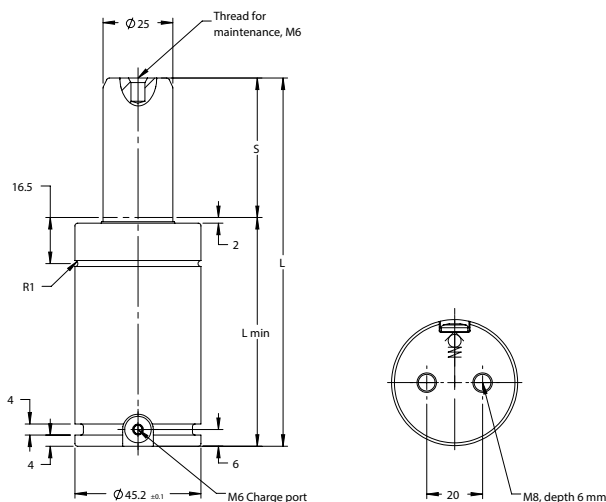 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	52	42	740	1210	0.37	0.020	X-750-10
13	58	45	740	1210	0.39	0.020	X-750-13
16	64	48	740	1210	0.41	0.030	X-750-16
19	70	51	740	1170	0.41	0.030	X-750-19
25	82	57	740	1180	0.45	0.040	X-750-25
32	96	64	740	1180	0.50	0.050	X-750-32
38	108	70	740	1180	0.53	0.050	X-750-38
50	132	82	740	1180	0.61	0.070	X-750-50
63	158	95	740	1180	0.69	0.090	X-750-63
75	182	107	740	1190	0.77	0.10	X-750-75
80	192	112	740	1190	0.80	0.11	X-750-80
100	232	132	740	1190	0.93	0.13	X-750-100
125	282	157	740	1190	1.09	0.17	X-750-125

EINBAUVARIANTEN

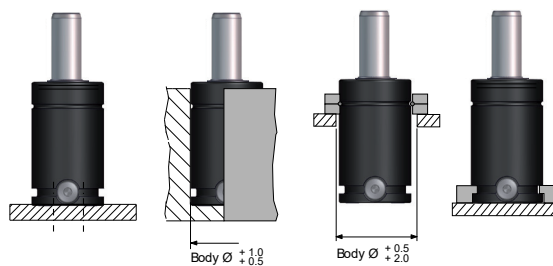

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3019903