




SN2811-C-2800

Gasdruckfeder Extra Power

Gas spring Extra Power

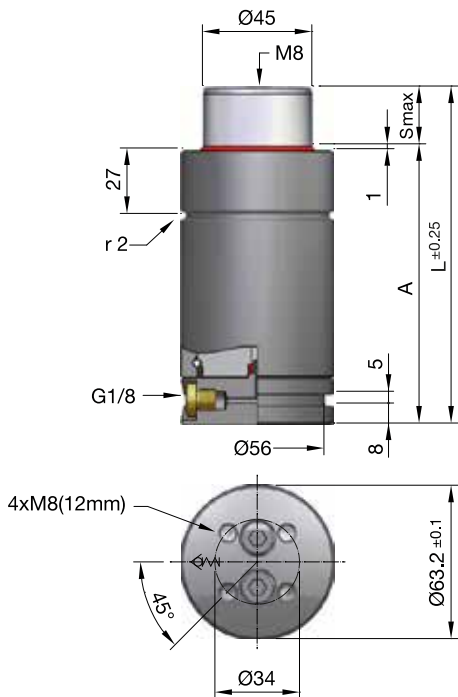

max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	102	114	175	2800 (± 5%)	3740	15.90	1.41	0.075	SN2811-C-2800-12
25	115	140	175	2800 (± 5%)	4305	15.90	1.92	0.112	SN2811-C-2800-25
38	132	170	175	2800 (± 5%)	4485	15.90	2.35	0.159	SN2811-C-2800-38
50	145	195	175	2800 (± 5%)	4515	15.90	2.37	0.207	SN2811-C-2800-50
63	167	230	175	2800 (± 5%)	4595	15.90	2.45	0.254	SN2811-C-2800-63
80	190	270	175	2800 (± 5%)	4650	15.90	2.62	0.317	SN2811-C-2800-80

EINBAUVARIANTEN/INSTALLATION VARIANTS





SN2811-C-2800

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC2800
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

