




SN2811-2800

Gasdruckfeder Extra Power

Gas spring Extra Power

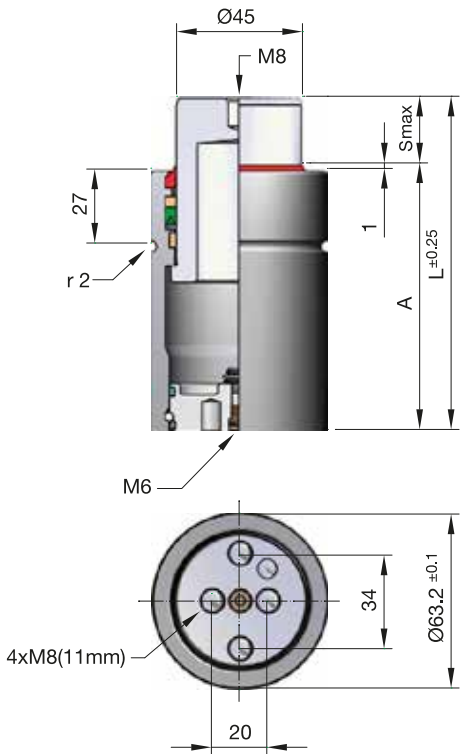

max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	82	94	175	2800 (± 5%)	3740	15.90	1.31	0.075	SN2811-2800-12
25	95	120	175	2800 (± 5%)	4305	15.90	1.52	0.112	SN2811-2800-25
38	112	150	175	2800 (± 5%)	4485	15.90	1.85	0.159	SN2811-2800-38
50	125	175	175	2800 (± 5%)	4515	15.90	1.97	0.207	SN2811-2800-50
63	147	210	175	2800 (± 5%)	4595	15.90	2.05	0.254	SN2811-2800-63
80	170	250	175	2800 (± 5%)	4650	15.90	2.22	0.317	SN2811-2800-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS





SN2811-2800

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-H2800
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

